


CATUSA.

TUBERÍA

Pared delgada


TUBO DE HIERRO GALVANIZADO SIN ROSCA, DE 3 METROS DE LONGITUD

Catálogo	Diámetro Nominal		Espesor de la pared mm	Diámetro Interior		Peso por Tramo en Kg.	Tubos Atado	
	mm	pulg.		pulg.	mm			pulg.
TPD13	13	1/2"	1.06	0.0418	15.78	0.522	1.44	20
TPD19	19	3/4"	1.06	0.0418	21.28	0.838	1.884	15
TPD25	25	1"	1.52	0.0598	26.46	1.043	3.393	10
TPD32	32	1 1/4"	1.52	0.0598	35.26	1.39	4.407	5
TPD38	38	1 1/2"	1.52	0.0598	41.16	1.62	5.085	5
TPD51	51	2"	1.52	0.0598	55.26	2.077	6.708	



CODO A 90° PARED GRUESA SIN ROSCA

Catálogo	Diámetro Nominal		Desarrollo mm	Radio mm	Peso Kg.
	mm	pulg.			
CPD13	13	1/2"	279.4	107.9	0.15
CPD19	19	3/4"	317.5	114.3	0.25
CPD25	25	1"	368.3	146	0.45
CPD32	32	1 1/4"	419.1	184.1	0.65
CPD38	38	1 1/2"	489	209.5	0.8
CPD51	51	2"	600	241.3	1.25

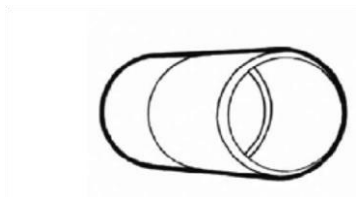

**COPLE PARED DELGADA
GALVANIZADO
SIN ROSCA**

Catálogo	Diámetro Nominal		Empaque	Peso Empaque
	mm	Pulg.		
CLD13PD	13	1/2"	100	2.6
CLD19PD	19	3/4"	100	3.3
CLD25PD	25	1"	50	1.8
CLD32PD	32	1 1/4"	25	3
CLD38PD	38	1 1/2"	20	2.9
CLD51PD	51	2"	12	2.1

**CONECTOR PARED DELGADA GALVANIZADO
SIN ROSCA**

Catálogo	Diámetro Nominal		Empaque	Peso Empaque
	mm	Pulg.		
CON13	13	1/2"	100	2.4
CON19	19	3/4"	100	3.7
CON25	25	1"	40	2.3
CON32	32	1 1/4"	20	2.2
CON38	38	1 1/2"	20	2.7
CON51	51	2"	12	2.2

